



Welcome

Catalog

Ovens
01-16

Classic
Fashion
Chef

Oven

Electric hob
17-36

Induction hob
Ceramic hob

Electric hob

Gas hob
37-52

Stainless steel gas hob
Gas on glass hob

Gas hob

Hood
53-64

Wall-mounted hood
Island hood

Hood

Oven

Today, oven remains the centerpiece of every kitchen. To have a good oven in your product range is also a must to most of companies with cooking appliances. That's why we developed a wide range of ovens with different features and designs to suit your business.



Design & Innovation



Energy efficiency A+

Save money and energy at home. Energy saving is not only a slogan, but a concept, a design, and a way of life. All of our ovens are compliance with the latest EU energy class A; and our innovative A+ platform built-in oven is the best choice to reduce power consumption for daily cooking.



Seamless welding cavity

The seamless welding cavity demonstrate our technology and our faith to make better products. The smooth internal cavity with strictest thickness controlled enamel is the key to have energy efficiency and best cooking performance.



TFT display

An intelligent control display, Forget about the manuals, just touch and slide, simply as what you'd expect from smart phone.



288

288 units loading qty

288 units loading qty

We care about our partners not only by providing good quality products and competitive price, but also saving the hidden cost. Our 58L oven can load 288pcs in one 40'HQ, saving 1/3 of the freight cost for you.



Large cavity 80L

Our new 80L cavity oven is around 40% bigger than a normal oven you may have, while keep the Cut out dimension same as before. You can have it for your new kitchen or just replace your old oven easily.



Easy removable door

Cleaning is not a headache anymore. with our new easy removable oven door, you don't need screwdriver to remove the door and inner glasses. Just push and lift, it is so easy.



Performance & safety



Multifunction oven

Multifunction oven

The multifunction oven offers more than 10 functions for really flexible cooking, from crisping up the base of your pizza to browning your favorite pasta dish.



Precise temperature control $\pm 5^{\circ}\text{C}$

Precise temperature control $\pm 5^{\circ}\text{C}$

The electronic thermostat is adjusted according to huge testing data, to ensure the precise temperature control within 5°C .



Patented heating logic

patented heating logic

Our patented heating compensation technology can have convection fan involved automatically when needed, to make the best heating evenness when you cook.



telescopic runner with stopper

Telescopic runner with stopper

Our half or fully extendable telescopic runners make it easy to take baking trays in and out. The risk of sustaining a burn is significantly reduced.



Delayed shut off of cooling fan

Delayed shut off of cooling fan

The integrated cooling fan keeps the control panel operating components cool and also helps reduce the temperatures the oven door. The delayed shut off is an important feature to keep your oven reliable and safety.



cool oven door surface

Cool oven door surface

With our optional 4 layer glazed door, the surface is cool to 45°C on stainless steel decoration parts.



finger proof stainless steel decoration

Finger proof stainless steel decoration

Finger proof stainless steel decoration.



Soft close door

Soft close door

A concealed mechanism in the door hinge makes it impossible to close the oven door too forcefully, ensuring a quiet close safely.

Ovens



Ovens



OVENS



Aoms Model No.	BG-7B22A1D	BH-7B22B1D	BH-7B22B2D
Functions			
Functions	4 functions	4 functions	5 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	-	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	-	-	-
Cooling fan	●	●	●
Convection fan	-	-	-
Oven lamp	●	●	●
Rotisserie	-	-	-
Steam cleaning	-	-	-
Pyrolytic self-cleaning	-	-	-
Child lock	-	-	-
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2200W	2200W	2200W
Cavity	Embossed enamelled cavity	Embossed enamelled cavity	Embossed enamelled cavity
Net cavity volume	65L ◊ 73L ◊ 80L	65L ◊ 73L ◊ 80L	65L ◊ 73L ◊ 80L
Chrome side rack with stopper	○	○	○
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 2 layer	● 2 layer	● 2 layer
Control	● Mechanical	● Mechanical	● Mechanical
Timer	○	○	○
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	SS Cosmetic 'BA'	Full glass 'BH'	Full glass 'BH'
Door glass	● Standard glass	● Standard glass	● Pure white glass
Control knob	● Plastic knob(#2)	● Plastic knob(#18)	● Metal knob(#53)
Handle	● Aluminium handle(#5)	● SS handle(#35)	● SS handle(#35)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill shelf (6) x 1	● Grill shelf (6) x 1	● Grill shelf (6) x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	○	○	○
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x530x595
Packaging (WxDxH)	650x580x665	650x580x665	650x580x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	24.8	25.5	25.5
Gross	26.7	27.4	27.4
Loading Quantity			
20'GP / 40'GP / 40'HQ	108 / 216 / 288	108 / 216 / 288	108 / 216 / 288
MOQ (pcs)	108	108	108
Optional with extra			

OVENS



Aoms Model No.	BF-6B22C1M	BE-6B22C2M	BE-6A29C4M1
Functions			
Functions	5 functions	6 functions	7 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	● 1600W	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	-	-	-
Cooling fan	●	●	●
Convection fan	●	●	●
Oven lamp	●	●	●
Rotisserie	-	○	○
Steam cleaning	-	-	-
Pyrolytic self-cleaning	-	-	-
Child lock	-	-	-
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2200W	2200W	2900W
Cavity	Embossed enamelled cavity	Embossed enamelled cavity	Embossed enamelled cavity with side racks
Net cavity volume	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L
Chrome side rack with stopper	○	○	○
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 2 layer	● 2 layer	● 2 layer
Control	● Mechanical	● Mechanical	● Mechanical
Timer	○	○	○ analog clock
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	SS Cosmetic "BF"	SS Cosmetic "BE"	Ivory enamelled Cosmetic "BE"
Door glass	● Standard glass	● Standard glass	● Standard glass
Control knob	● Metal knob(#32)	● Metal knob(#32)	● Retro metal knobs (14)
Handle	● SS handle(#35)	● Aluminium handle(1)	● Retro metal handle (23)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill shelf (6) x 1	● Grill shelf (6) x 1	● Grill shelf (6) x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	○	○	○
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x575x595
Packaging (WxDxH)	650x580x665	650x580x665	650x680x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	26.5	26.6	28
Gross	28.4	28.5	30
Loading Quantity			
20'GP / 40'GP / 40'HQ	108 / 216 / 288	108 / 216 / 288	81/162/216
MOQ (pcs)	108	108	100
Optional with extra			

OVENS



Aoms Model No.	BI-6A29C4E3	BF-6A22G1E9	BF-6A29E7E5
Functions			
Functions	7 functions	8 functions	9 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	● 1600W	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	-	-	● 1800W
Cooling fan	●	●	●
Convection fan	●	●	●
Oven lamp	●	●	●
Rotisserie	○	●	○
Steam cleaning	-	-	○
Pyrolytic self-cleaning	-	-	-
Child lock	-	-	●
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2900W	2200W	2900W
Cavity	Enamelled cavity with side racks	Enamelled cavity with side racks	Enamelled cavity with side racks
Net cavity volume	61L ○ 73L ○ 80L	61L ○ 73L ○ 80L	61L ○ 73L ○ 80L
Chrome side rack with stopper	●	●	●
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 2 layer	● 2 layer	● 3 layer
Control	● Mechanical	● Mechanical	● Electronic control
Timer	● 6 buttons 24H White LED timer	● Touch control 24H White LED timer	● Touch control 24H White LED timer
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	SS Cosmetic "BI"	SS Cosmetic "BE"(Grey matt)	SS Cosmetic "BF"
Door glass	● Standard glass	● Standard glass	● Standard glass
Control knob	● Push & pull	● Push & pull(Big size)	● Push & pull
Handle	● Aluminium handle(#19)	● Aluminium handle(#63)	● Aluminium handle(#3-1)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	○	○	-
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x530x595
Packaging (WxDxH)	650x580x665	650x580x665	650x580x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	27.5	28	28
Gross	28.5	30	30
Loading Quantity			
20'GP / 40'GP / 40'HQ	108 / 216 / 288	108 / 216 / 288	108 / 216 / 288
MOQ (pcs)	108	108	108
Optional with extra			

OVENS



Aoms Model No.	BH-6A29E5E1	BH-6A29E8E6	BF-6A29E9E2
Functions			
Functions	8 functions	10 functions	11 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	● 1600W	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	● 1800W	● 1800W	● 1800W
Cooling fan	●	●	●
Convection fan	●	●	●
Oven lamp	●	●	●
Rotisserie	○	○	○
Steam cleaning	-	-	-
Pyrolytic self-cleaning	-	-	-
Child lock	-	-	-
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2900W	2900W	2900W
Cavity	Enamelled cavity with side racks	Enamelled cavity with side racks	Enamelled cavity with side racks
Net cavity volume	61L ○ 73L ○ 80L	61L ○ 73L ○ 80L	61L ○ 73L ○ 80L
Chrome side rack with stopper	●	●	●
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 2 layer	● 2 layer	● 2 layer
Control	● Mechanical	● Mechanical	● Mechanical
Timer	● 3 buttons 24H White LED timer	● Touch control 24H White LED timer	● Touch control 24H White LED timer
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	Full glass 'BH'	Full glass 'BH'	SS Cosmetic "BF"
Door glass	● Standard colour	● Pure white glass	● Standard glass
Control knob	● Push & pull	● Push & pull	● Push & pull
Handle	● Aluminium handle(#1)	● Aluminium handle(#22)	● Aluminium handle(#29)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	○	○	○
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x530x595
Packaging (WxDxH)	650x580x665	650x580x665	650x580x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	28.5	28.5	28.5
Gross	30.5	30.5	30.5
Loading Quantity			
20'GP / 40'GP / 40'HQ	108 / 216 / 288	108 / 216 / 288	108 / 216 / 288
MOQ (pcs)	108	108	108
Optional with extra			

OVENS



Aoms Model No.	BF-6A29E0E4	BG-6A29E0T5	BH-6A29E0T2
Functions			
Functions	10 functions	10 functions	10 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	● 1600W	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	● 1800W	● 1800W	● 1800W
Cooling fan	●	●	●
Convection fan	●	●	●
Oven lamp	●	●	●
Rotisserie	○	○	○
Steam cleaning	○	○	○
Pyrolytic self-cleaning	-	-	-
Child lock	●	●	●
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2900W	2900W	2900W
Cavity	Enamelled cavity with side racks	Enamelled cavity with side racks	Enamelled cavity with side racks
Net cavity volume	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L
Chrome side rack with stopper	●	●	●
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 3 layer	● 3 layer	● 3 layer
Control	● Electronic control	● Touch control	● Touch control
Timer	● 24H LED timer	● 24H blue LCD display	● 24H LED display
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	Full glass 'BH'	Full glass 'BH'	Full glass 'BH'
Door glass	● Standard glass	● Standard glass	● Standard glass
Control knob	● Metal knob(#64)	-	-
Handle	● Aluminium handle(#28)	● Aluminium handle(28)	● Aluminium handle(1)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	-	○	-
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x530x595
Packaging (WxDxH)	650x580x665	650x580x665	650x580x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	29	29	29
Gross	31	31	31
Loading Quantity			
20'GP / 40'GP / 40'HQ	108 / 216 / 288	108/216/288	108 / 216 / 288
MOQ (pcs)	108	100	108
Optional with extra			

OVENS



Aoms Model No.	BH-6A29I1T3	BH-6A29J2T4	BH-8A29H1T6
Functions			
Functions	12 functions	13 functions	14 functions
Top heating element	● 1300W	● 1300W	● 1300W
grill heating element	● 1600W	● 1600W	● 1600W
Bottom heating element	● 900W	● 900W	● 900W
Convection element	● 1800W	● 1800W	● 1800W
Cooling fan	●	●	●
Convection fan	●	●	●
Oven lamp	●	●	●
Rotisserie	○	○	-
Steam cleaning	○	○	○
Pyrolytic self-cleaning	-	-	●
Child lock	●	●	●
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Total power	2900W	2900W	2900W
Cavity	Enamelled cavity with side racks	Enamelled cavity with side racks	Enamelled cavity with side racks
Net cavity volume	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L	61L ◊ 73L ◊ 80L
Chrome side rack with stopper	●	●	●
5 shelf positions	●	●	●
Interior oven light	● 1 bulb	● 1 bulb	● 1 bulb
Removable full glass oven door	● 3 layer	● 3 layer	● 3 layer
Control	● Touch control	● Touch control	● Touch control
Timer	● 24H LCD display	● 24H LCD display	● Touch control 24 hour white LED timer
Power cord	● 1m Power cord without plug	● 1m Power cord without plug	● 1m Power cord without plug
Energy efficiency	EU energy class A	EU energy class A	EU energy class A
Certification	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH	GS/SAA/EMC/EUP, RoHS, REACH
Cosmetic specification			
Aesthetic assy	Full glass 'BH'	Full glass 'BH'	Full glass 'BH'
Door glass	● Standard glass	● White+grey glass	● Standard glass
Control knob	-	-	● Metal knobs(32)
Handle	● Aluminium handle(19)	● Aluminium handle(19)	● Aluminium handle(19)
Carton	● shrink wrapping package	● shrink wrapping package	● shrink wrapping package
Accessories			
Telescopic runners	○	○	○
Grill shelf	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1	● Grill (4) - safety shelf x 1
Baking tray insert	○	○	○
Baking tray	● x 1	● x 1	● x 1
Deep tray	-	-	○
Grill pan handle	○	○	○
Pizza stone	○	○	○
Food Probe	○	○	○
General information			
Dimensions (mm)			
Net (WxDxH)	595x530x595	595x530x595	595x575x595
Packaging (WxDxH)	650x580x665	650x580x665	650x680x665
Cut-out (WxDxH)	560x580x600	560x580x600	560x580x600
Weight (Kg)			
Net	29	30.5	30.5
Gross	31	33	32.5
Loading Quantity			
20'GP / 40'GP / 40'HQ	81 / 162 / 216	108 / 216 / 288	81 / 162 / 216
MOQ (pcs)	100	108	100
Optional with extra			



Ovens



Accessories



Accessories

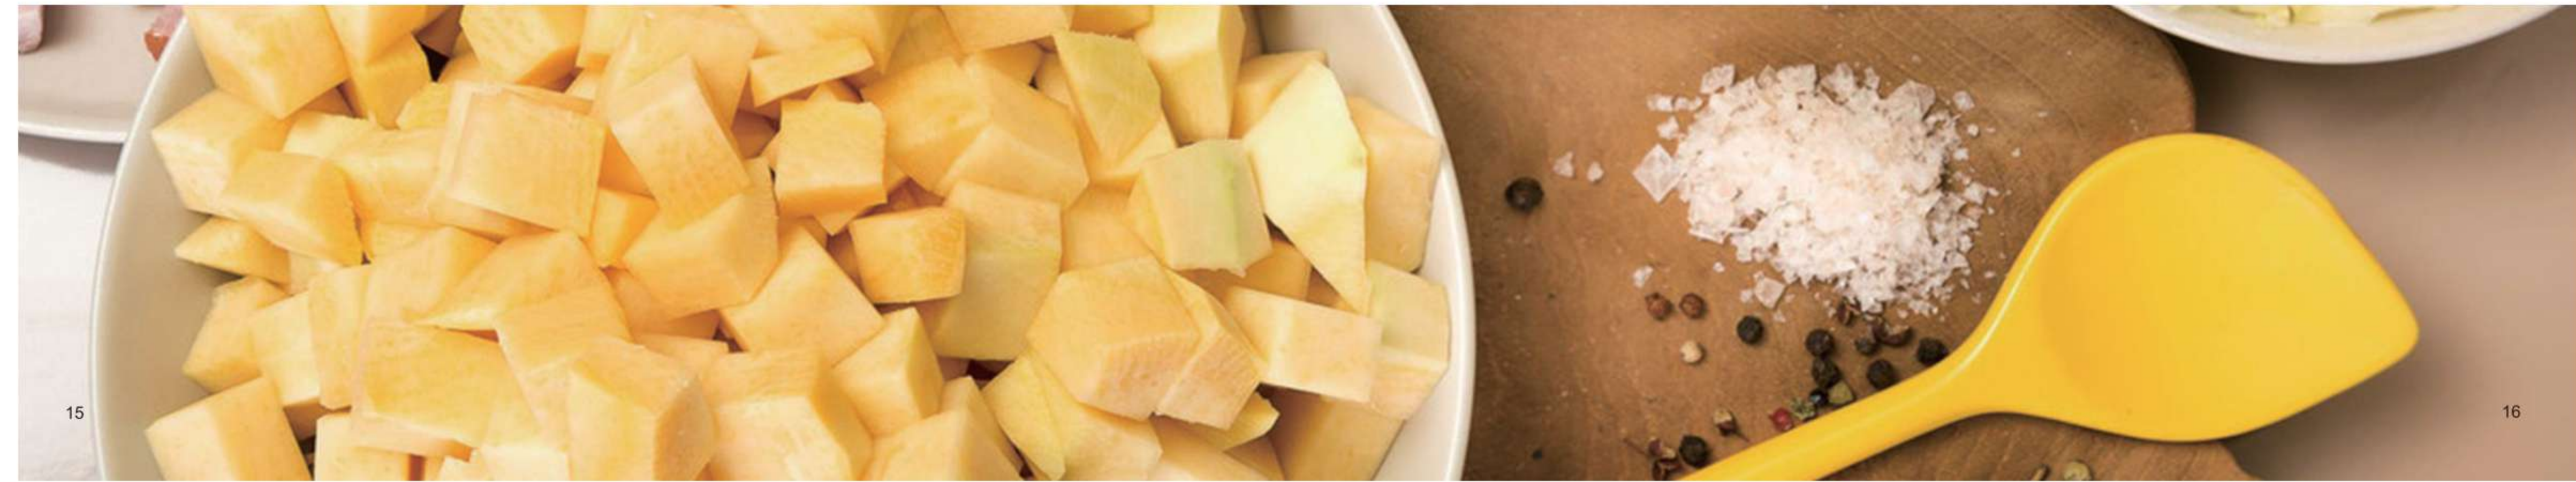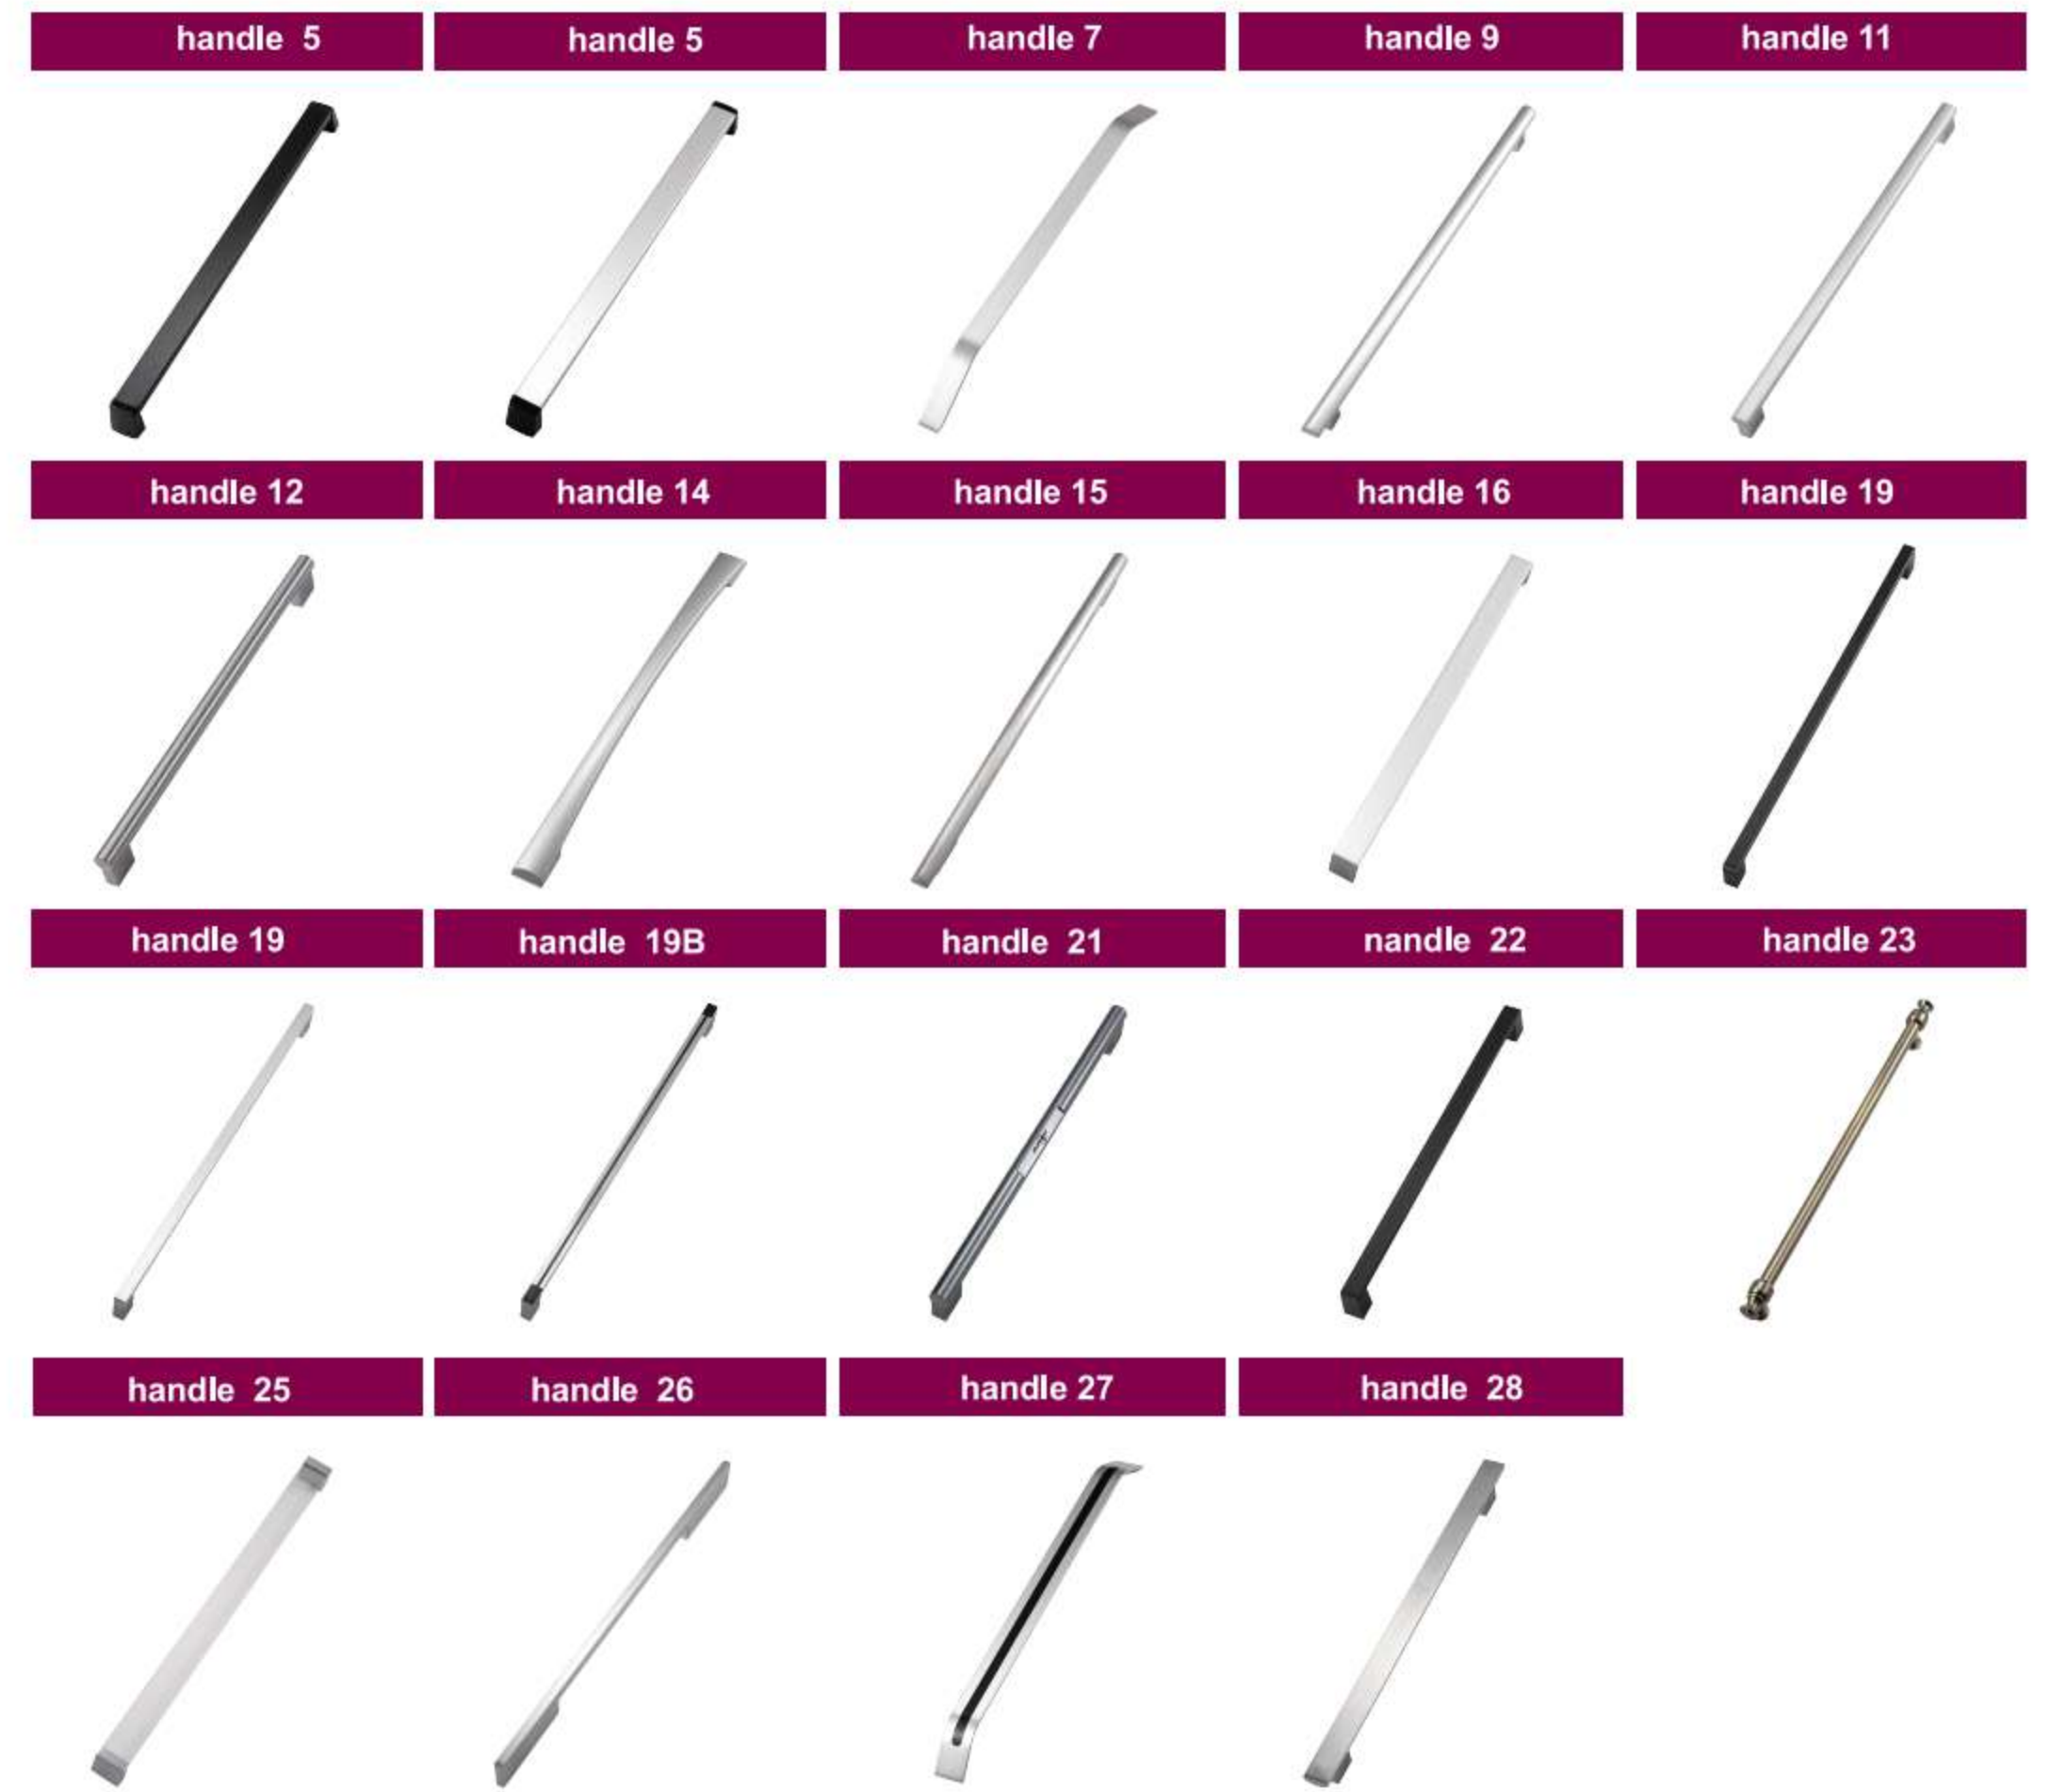

Electric hob

Induction Hob



Induction

Experience the ultimate in induction cooking - quick, safe, efficient, and offer maximum freedom in the kitchen. it is the trend in European market, Increasing dramatically every year.



Boost 10min

Induction cooking is recognized as one of the quickest methods of cooking while allowing instant and accurate temperature control. our leading technology can have the boost work for 10min for the first time in this industry. cooking even much faster.



Heating efficiency

Induction technology is the revolution for efficient cooking. Comparing with less than 60% efficiency on gas hobs, it can be as high as 89% on an induction hob. Heat is only generated on the pan, while having the rest of hobs still cool.



Durable power output

In the past, the power output of an induction hob damping very fast. After 40 mins the total power is only 50% left even setting at the highest power level. By redesigning the structure and coil, our induction can keep 76% output for one hour cooking. There is no need to wait for the induction cooling down again.



Free zone

A typical 3 zone induction is for Spanish paella; a typical oval zone is for German Weihnachtsgans. Free zone induction technology can let you use different pans on the same induction. Forget about the limitation, be free as you wish.



Precise power control +/-5%

It's easy to be fast, but not to be precise. 5% power tolerance is the strictest requirement in this industry. With our induction hob you can always get the power level you wish to use exactly.



Safety

There are so many safety features on our induction, cool touch display area, wipe protection, residual heat indication, automatic safety switch off, child lock, max power limitation, abnormal temperature protection... Enjoy all these features by getting our innovative induction hob.




Induction hob





INDUCTION

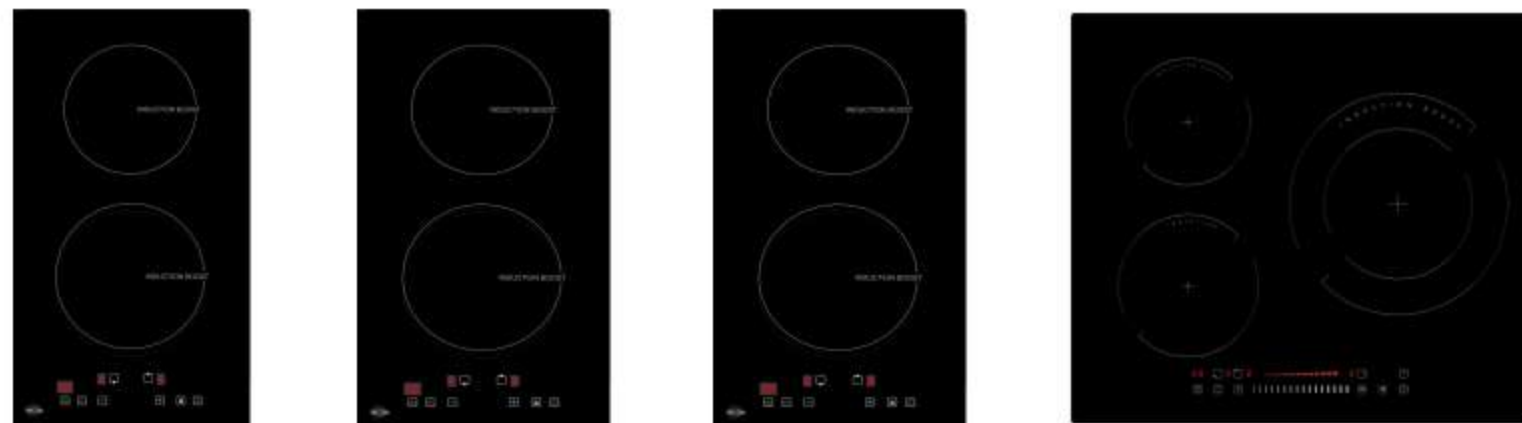


Product Category	Built-in Induction Hob (2 zones)	Built-in Induction Hob (2 zones)	Built-in Induction Hob (2 zones)	Built-in Induction Hob (3 zones)
AOMS Model No.	IL32-36N23S	IB32-36N23S	IP32-36N23S	IL63-66N22S
Functions				
Booster	-	1 booster	2 booster	-
Flexi mode	-	-	-	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min	• 99min
Pan sensor	•	•	•	•
Keep Warm	-	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"	• "H"
Child lock	•	•	•	•
Standard specification				
Voltage	220~240V	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control	• Slider control
Total power	• 3600W	• 3600W	• 3600W	• 6600W
Front left zone	• 180mm, 2000W	• 180mm, 2000/2200W	• 180mm, 2000/2200W	• 180mm, 2000W
Rear left zone	• 160mm, 1600W	• 160mm, 1600W	• 160mm, 1600/1800W	• 160mm, 1600W
Rear right zone	-	-	-	• 280mm, 3000W
Front right zone	-	-	-	-
Central zone	-	-	-	-
Flexi zone	-	-	-	-
Heating element	• Induction	• Induction	• Induction	• Induction
Power cord	• 1.2 m power cord with plug	• 1.2 m power cord with plug	• 1.2 m power cord with plug	• None ◊ 1.2m
Energy efficiency	-	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification				
Vitroc ceramic glass	• Chinese	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◊ _sides	◊ _sides	◊ _sides	◊ _sides
frame	◊ _sides	◊ _sides	◊ _sides	◊ _sides
Carton	• Brown box	• Brown box	• Brown box	• shrink wrapping package
Accessories				
Scraper	◊	◊	◊	◊
Pan	-	-	-	-
General information				
Product Dimensions (mm)				
Net (WxDxH)	295x520x64mm	295x520x64mm	295x520x64mm	590x520x64mm
Packaging (WxDxH)	600x360x110mm	600x360x110mm	600x360x110mm	630x565x107mm
Cut-out (WxD)	495x275mm	495x275mm	495x275mm	560x490mm
Product Weight (Kg)				
Net	5.2kg	5.2kg	5.2kg	10.3kg
Gross	6.7kg	6.7kg	6.7kg	12.0kg
Loading Quantity				
20'GP / 40'GP / 40'HQ	1281/2583/2976	1281/2583/2976	1281/2583/2976	814/1650/1900
MOQ per order (pcs)	200	200	200	200
Optional with extra cost				

INDUCTION



Product Category	Built-in Induction Hob (3 zones)	Built-in Induction Hob (3 zones)	Built-in Induction Hob (3 zones)
AOMS Model No.	IB63-72N22S	IT63-72N22S	IL63-66L22S
Functions			
Booster	1 booster	2 booster	-
Flexi mode	-	-	• left
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	•	•	•
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control
Total power	• 7200W	• 7200W	• 6600W
Front left zone	• 180mm, 2000W	• 180mm, 2000/2200W	• 190*190mm, 1800W
Rear left zone	• 160mm, 1600W	• 160mm, 1600W	• 190*190mm, 1800W
Rear right zone	• 280mm, 3000/3500W	• 280mm, 3000/3500W	• 280mm, 3000W
Front right zone	-	-	-
Central zone	-	-	-
Flexi zone	-	-	• left
Heating element	• Induction	• Induction	• Induction
Power cord	• None ◊ 1.2m	• None ◊ 1.2m	• None ◊ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroc ceramic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◊ _sides	◊ _sides	◊ _sides
frame	◊ _sides	◊ _sides	◊ _sides
Carton	• shrink wrapping package	• shrink wrapping package	• shrink wrapping package
Accessories			
Scraper	◊	◊	◊
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x64mm	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	10.3kg	10.3kg	10.3kg
Gross	12.0kg	12.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200	200
Optional with extra cost			

INDUCTION

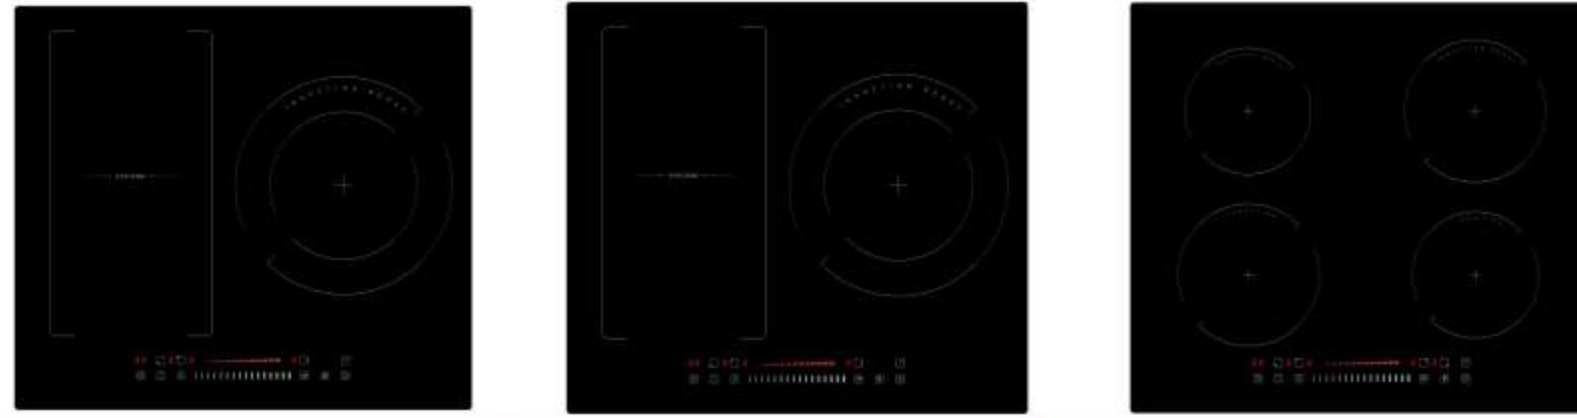

Product Category	Built-in Induction Hob (3 zones)	Built-in Induction Hob (3 zones)	Built-in Induction Hob (4 zones)
AOMS Model No.	IB63-72L22S	IT63-72L22S	IL64-72N22S
Functions			
Booster	1 booster	2 booster	-
Flexi mode	• left	• left	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	•	•	•
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control
Total power	• 7200W	• 7200W	• 7200W
Front left zone	• 190*190mm , 1800W	• 190*190mm , 1800/2100W	• 180mm, 2000W
Rear left zone	• 190*190mm , 1800W	• 160mm, 1600W	• 160mm, 1600W
Rear right zone	• 280mm , 3000/3500W	• 280mm , 3000/3500W	• 180mm, 2000W
Front right zone	-	-	• 160mm, 1600W
Central zone	-	-	-
Flexi zone	• left	• left	-
Heating element	• Induction	• Induction	• Induction
Power cord	• None ◊ 1.2m	• None ◊ 1.2m	• None ◊ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◊ _sides	◊ _sides	◊ _sides
frame	◊ _sides	◊ _sides	◊ _sides
Carton	• shrink wrapping package	• shrink wrapping package	• shrink wrapping package
Accessories			
Scraper	◊	◊	◊
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x64mm	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	10.3kg	10.3kg	10.3kg
Gross	12.0kg	12.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200	200
Optional with extra cost			


INDUCTION



Product Category	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)
AOMS Model No.	IB64-72N22S	IT64-72N22S	IP64-72N22S
Functions			
Booster	1 booster	2 booster	4 booster
Flexi mode	-	-	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	•	•	•
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control
Total power	• 7200W	• 7200W	• 7200W
Front left zone	• 180mm , 2000/2200W	• 180mm , 2000/2200W	• 180mm , 2000/2200W
Rear left zone	• 160mm, 1600W	• 160mm, 1600W	• 160mm , 1600/1800W
Rear right zone	• 180mm, 2000W	• 180mm , 2000/2200W	• 180mm , 2000/2200W
Front right zone	• 160mm, 1600W	• 160mm, 1600W	• 160mm, 1600W
Central zone	-	-	-
Flexi zone	-	-	-
Heating element	• Induction	• Induction	• Induction
Power cord	• None ◊ 1.2m	• None ◊ 1.2m	• None ◊ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◊ _sides	◊ _sides	◊ _sides
frame	◊ _sides	◊ _sides	◊ _sides
Carton	• shrink wrapping package	• shrink wrapping package	• shrink wrapping package
Accessories			
Scraper	◊	◊	◊
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x64mm	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	10.3kg	10.3kg	10.3kg
Gross	12.0kg	12.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200	200
Optional with extra cost			



INDUCTION

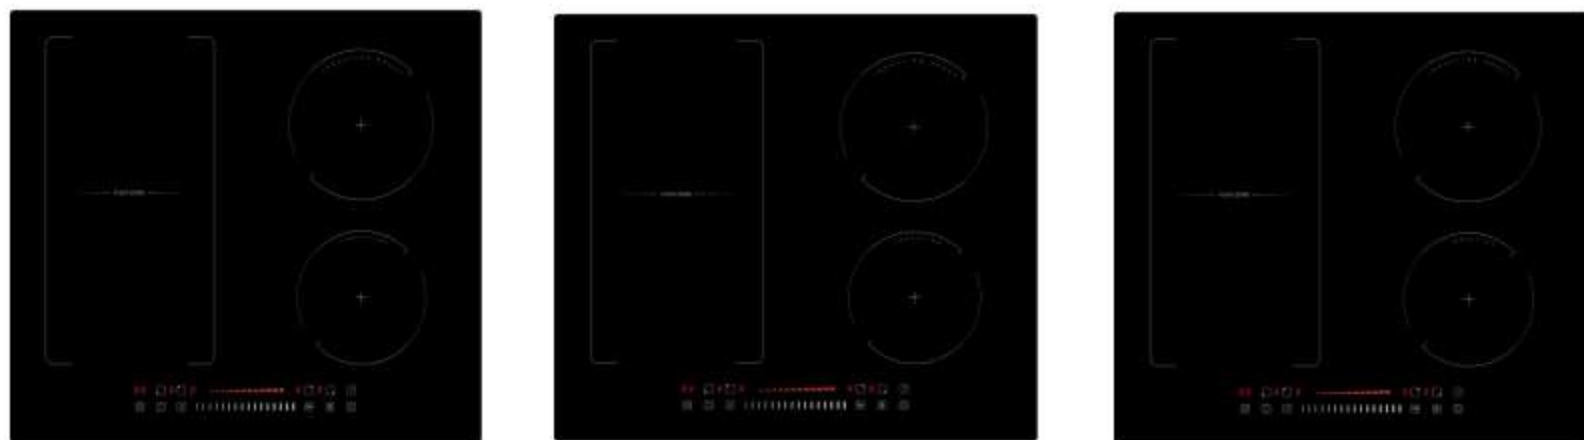


Product Category	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)
AOMS Model No.	IL64-72L22S	IB64-72L22S	IT64-72L22S
Functions			
Booster	-	1 booster	2 booster
Flexi mode	• left	• left	• left
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	•	•	•
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control
Total power	• 7200W	• 7200W	• 7200W
Front left zone	• 190*190mm , 1800W	• 190*190mm , 1800W	• 190*190mm , 1800/2100W
Rear left zone	• 190*190mm , 1800W	• 190*190mm , 1800/2100W	• 190*190mm , 1800/2100W
Rear right zone	• 180mm, 2000W	• 180mm, 2000W	• 180mm, 2000W
Front right zone	• 160mm, 1600W	• 160mm, 1600W	• 160mm, 1600W
Central zone	-	-	-
Flexi zone	• left	• left	• left
Heating element	• Induction	• Induction	• Induction
Power cord	• None ∅ 1.2m	• None ∅ 1.2m	• None ∅ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RoSH compliance	GS/SAA/EMC/EUP, RoSH compliance	GS/SAA/EMC/EUP, RoSH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	∅ _ sides	∅ _ sides	∅ _ sides
frame	∅ _ sides	∅ _ sides	∅ _ sides
Carton	• shrink wrapping package	• shrink wrapping package	• shrink wrapping package
Accessories			
Scraper	∅	∅	∅
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x64mm	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	10.3kg	10.3kg	10.3kg
Gross	12.0kg	12.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200	200
Optional with extra cost			

INDUCTION



Product Category	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)
AOMS Model No.	IP64-72L22S	IL64-72D22S	IB64-72D22S
Functions			
Booster	4 booster	-	1 booster
Flexi mode	• left	• left & right	• left & right
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	•	•	•
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control	• Slider control
Total power	• 7200W	• 7200W	• 7200W
Front left zone	• 190*190mm , 1800/2100W	• 190*190mm , 1800W	• 190*190mm , 1800W
Rear left zone	• 190*190mm , 1800/2100W	• 190*190mm , 1800W	• 190*190mm , 1800/2100W
Rear right zone	• 180mm , 2000/2200W	• 190*190mm , 1800W	• 190*190mm , 1800W
Front right zone	• 160mm , 1600/1800W	• 190*190mm , 1800W	• 190*190mm , 1800W
Central zone	-	-	-
Flexi zone	• left	• left & right	• left & right
Heating element	• Induction	• Induction	• Induction
Power cord	• None ∅ 1.2m	• None ∅ 1.2m	• None ∅ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RoSH compliance	GS/SAA/EMC/EUP, RoSH compliance	GS/SAA/EMC/EUP, RoSH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	∅ _ sides	∅ _ sides	∅ _ sides
frame	∅ _ sides	∅ _ sides	∅ _ sides
Carton	• shrink wrapping package	• shrink wrapping package	• shrink wrapping package
Accessories			
Scraper	∅	∅	∅
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x64mm	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	10.3kg	10.3kg	10.3kg
Gross	12.0kg	12.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200	200
Optional with extra cost			

INDUCTION

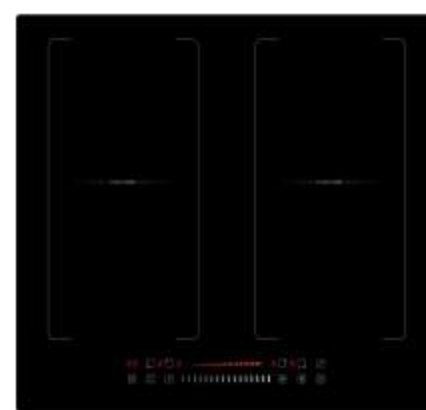


Product Category	Built-in Induction Hob (4 zones)	Built-in Induction Hob (4 zones)
AOMS Model No.	IT64-72D22S	IP64-72D22S
Functions		
Booster	2 booster	4 booster
Flexi mode	• left & right	• left & right
Power stage setting	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min
Pan sensor	•	•
Keep Warm	-	-
Automatic safety switch off	• 120min	• 120min
Residual heat indicator	• "H"	• "H"
Child lock	•	•
Standard specification		
Voltage	220-240V	220-240V
Frequency	50/60Hz	50/60Hz
Control mode	• Slider control	• Slider control
Total power	• 7200W	• 7200W
Front left zone	• 190*190mm , 1800W	• 190*190mm , 1800/2100W
Rear left zone	• 190*190mm , 1800/2100W	• 190*190mm , 1800/2100W
Rear right zone	• 190*190mm , 1800W	• 190*190mm , 1800/2100W
Front right zone	• 190*190mm , 1800/2100W	• 190*190mm , 1800/2100W
Central zone	-	-
Flexi zone	• left & right	• left & right
Heating element	• Induction	• Induction
Power cord	• None ∅ 1.2m	• None ∅ 1.2m
Energy efficiency	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification		
Vitroceraamic glass	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour
Bevelled edge	∅_ sides	∅_ sides
frame	∅_ sides	∅_ sides
Carton	• shrink wrapping package	• shrink wrapping package
Accessories		
Scraper	∅	∅
Pan	-	-
General information		
Product Dimensions (mm)		
Net (WxDxH)	590x520x64mm	590x520x64mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm
Product Weight (Kg)		
Net	10.3kg	10.3kg
Gross	12.0kg	12.0kg
Loading Quantity		
20'GP / 40'GP / 40'HQ	814/1650/1900	814/1650/1900
MOQ per order (pcs)	200	200
Optional with extra cost		



Ceramic hob




Ceramic hob

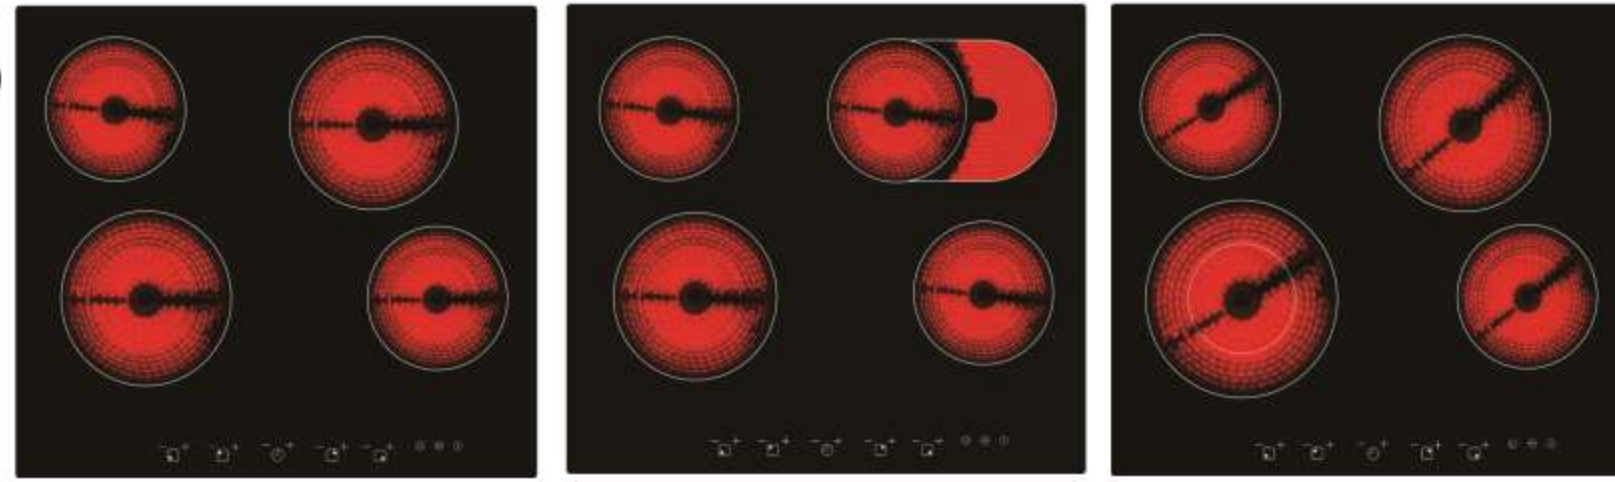


Product Category	Built-in Ceramic Hob	Built-in Ceramic Hob	Built-in Ceramic Hob
AOMS Model No.	HB64-60N02T	HB64-62N02T	HB64-64N02T
Functions			
Booster	-	-	-
Flexi mode	-	-	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	-	-	-
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Touch control	• Touch control	• Touch control
Total power	• 6000W	• 6200W	• 6400W
Front left zone	• 190mm, 1800W	• 190mm, 1800W	• 140/220mm, 1000/2200W
Rear left zone	• 155mm, 1200W	• 155mm, 1200W	• 155mm, 1200W
Rear right zone	• 190mm, 1800W	• 155/260*155mm, 1100/2000W	• 190mm, 1800W
Front right zone	• 155mm, 1200W	• 155mm, 1200W	• 155mm, 1200W
Central zone	-	-	-
Flexi zone	-	-	-
Heating element	• Chinese burner ◯ EGO	• Chinese burner ◯ EGO	• Chinese burner ◯ EGO
Power cord	• None ◯ 1.2m	• None ◯ 1.2m	• None ◯ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◯ _sides	◯ _sides	◯ _sides
frame	◯ _sides	◯ _sides	◯ _sides
Carton	• shrink wrapping package ◯ Brown box	• shrink wrapping package ◯ Brown box	• shrink wrapping package ◯ Brown box
Accessories			
Scraper	◯	◯	◯
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x46mm	590x520x46mm	590x520x46mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	9.3kg	9.3kg	9.3kg
Gross	10.8kg	10.8kg	10.8kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	777 / 1638 / 1868	777 / 1638 / 1868	777 / 1638 / 1868
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Ceramic hob

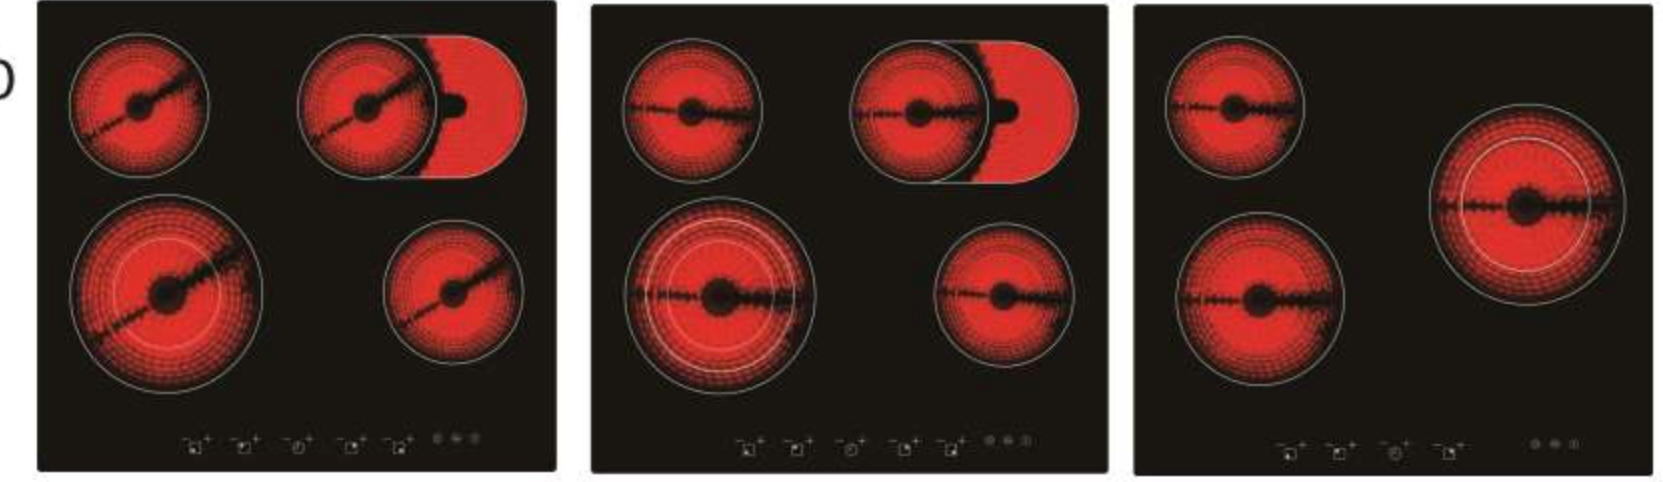


Product Category	Built-in Ceramic Hob	Built-in Ceramic Hob	Built-in Ceramic Hob
AOMS Model No.	HB64-66N02T	HB64-67N02T	HB63-52N02T
Functions			
Booster	-	-	-
Flexi mode	-	-	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	-	-	-
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Touch control	• Touch control	• Touch control
Total power	• 6600W	• 6700W	• 5200W
Front left zone	• 140/220mm, 1000/2200W	• 120/175/220mm, 800/1600/2300W	• 190mm, 1800W
Rear left zone	• 155mm, 1200W	• 155mm, 1200W	• 155mm, 1200W
Rear right zone	• 155/260*155mm, 1100/2000W	• 155/260*155mm, 1100/2000W	• 140/220mm, 1000/2200W
Front right zone	• 155mm, 1200W	• 155mm, 1200W	-
Central zone	-	-	-
Flexi zone	-	-	-
Heating element	• Chinese burner ◯ EGO	• Chinese burner ◯ EGO	• Chinese burner ◯ EGO
Power cord	• None ◯ 1.2m	• None ◯ 1.2m	• None ◯ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◯ _sides	◯ _sides	◯ _sides
frame	◯ _sides	◯ _sides	◯ _sides
Carton	• shrink wrapping package ◯ Brown box	• shrink wrapping package ◯ Brown box	• shrink wrapping package ◯ Brown box
Accessories			
Scraper	◯	◯	◯
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x46mm	590x520x46mm	590x520x46mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	630x565x107mm
Cut-out (WxD)	560x490mm	560x490mm	560x490mm
Product Weight (Kg)			
Net	9.3kg	9.3kg	8.7kg
Gross	10.8kg	10.8kg	10.2kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	777 / 1638 / 1868	777 / 1638 / 1868	777 / 1638 / 1868
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Ceramic hob

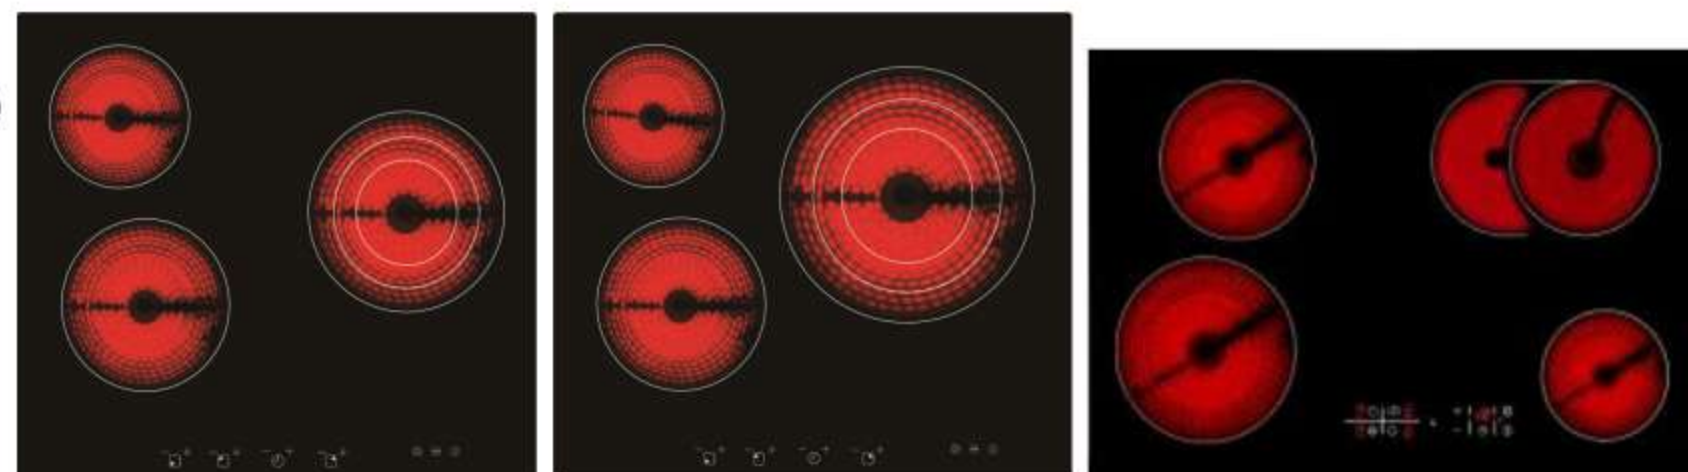

Product Category	Built-in Ceramic Hob	Built-in Ceramic Hob	Built-in Ceramic Hob
AOMS Model No.	HB63-53N02T	HB63-57N02T	VB73
Functions			
Booster	-	-	-
Flexi mode	-	-	-
Power stage setting	• 9 levels	• 9 levels	• 9 levels
Timer(min)	• 99min	• 99min	• 99min
Pan sensor	-	-	-
Keep Warm	-	-	-
Automatic safety switch off	• 120min	• 120min	• 120min
Residual heat indicator	• "H"	• "H"	• "H"
Child lock	•	•	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Touch control	• Touch control	• Touch control
Total power	• 5300W	• 5700W	• 7300W
Front left zone	• 190mm, 1800W	• 190mm, 1800W	• 126/220mm, 1000/2100W
Rear left zone	• 155mm, 1200W	• 155mm, 1200W	• 190mm, 1800W
Rear right zone	• 120/175/220mm, 800/1600/2300W	• 150/220/280mm, 1050/1950/2700W	• 180/275*180mm, 1400/2200W
Front right zone	-	-	• 155mm, 1200W
Central zone	-	-	-
Flexi zone	-	-	-
Heating element	• Chinese burner ◦ EGO	• Chinese burner ◦ EGO	• Chinese burner ◦ EGO
Power cord	• None ◦ 1.2m	• None ◦ 1.2m	• None ◦ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraamic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◦ _sides	◦ _sides	◦ _sides
frame	◦ _sides	◦ _sides	◦ _sides
Carton	• shrink wrapping package ◦ Brown box	• shrink wrapping package ◦ Brown box	• shrink wrapping package ◦ Brown box
Accessories			
Scraper	◦	◦	◦
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	590x520x46mm	590x520x46mm	750x520x46mm
Packaging (WxDxH)	630x565x107mm	630x565x107mm	780x566x115mm
Cut-out (WxD)	560x490mm	560x490mm	720x490mm
Product Weight (Kg)			
Net	9.3kg	9.1kg	10.3kg
Gross	10.8kg	10.6kg	11.8kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	777 / 1638 / 1868	777 / 1638 / 1868	616 / 1257 / 1446
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Ceramic hob

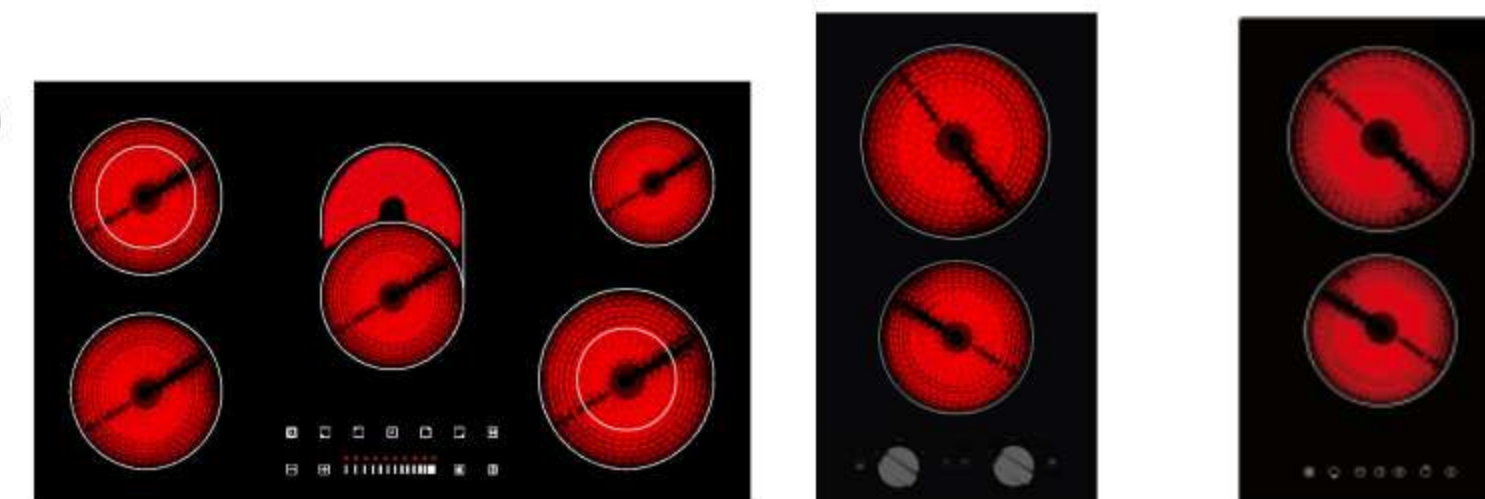

Product Category	Built-in Ceramic Hob	Built-in Ceramic Hob	Built-in Ceramic Hob
AOMS Model No.	VA90590	VD30	VB30
Functions			
Booster	-	-	-
Flexi mode	-	-	-
Power stage setting	• 9 levels	• 7 levels	• 9 levels
Timer(min)	• 99min	•	• 99min
Pan sensor	-	-	-
Keep Warm	-	-	-
Automatic safety switch off	• 120min	-	• 120min
Residual heat indicator	• "H"	•	• "H"
Child lock	•	-	•
Standard specification			
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control mode	• Slider control	• Knob control	• Touch control
Total power	• 9000W	• 3000W	• 3000W
Front left zone	• 190mm, 1800W	• 155mm, 1200W	• 155mm, 1200W
Rear left zone	• 130/190mm, 700/1700W	• 190mm, 1800W	• 190mm, 1800W
Rear right zone	• 155mm, 1200W	-	-
Front right zone	• 126/220mm, 1000/2100W	-	-
Central zone	• 180/275*180mm, 1400/2200W	-	-
Flexi zone	-	-	-
Heating element	• Chinese burner ◦ EGO	• Chinese burner ◦ EGO	• Chinese burner ◦ EGO
Power cord	• None ◦ 1.2m	• None ◦ 1.2m	• None ◦ 1.2m
Energy efficiency	-	-	-
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Cosmetic specification			
Vitroceraamic glass	• Chinese	• Chinese	• Chinese
Serigraphy colour	• 1 colour	• 1 colour	• 1 colour
Bevelled edge	◦ _sides	◦ _sides	◦ _sides
frame	◦ _sides	◦ _sides	◦ _sides
Carton	• shrink wrapping package ◦ Brown box	• Brown box	• Brown box
Accessories			
Scraper	◦	◦	◦
Pan	-	-	-
General information			
Product Dimensions (mm)			
Net (WxDxH)	900x520x46mm	290x510x46mm	290x510x46mm
Packaging (WxDxH)	930x566x115mm	330x575x125mm	330x575x125mm
Cut-out (WxD)	870x490mm	265x480mm	265x480mm
Product Weight (Kg)			
Net	12.6kg	4.8kg	4.7kg
Gross	14.1kg	6.3kg	6.2kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	480 / 998 / 1148	1278/2592/3024	1278/2592/3024
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Gas hob



Gas hob

Our gas hobs not only provide various configurations, they are also equipped with the fast wok burner. The cast iron pan supports provide a strong contemporary look and a stable base for any pan size.



Wok burner



Cast iron pan supports



Flame failure safety device



Gas hob

Gas hob

Stainless steel



GAS HOB


Stainless steel



AOMS Model No.	AICC3020	AICA4532-A	AICA6040
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	30cm	45cm	60cm
Control mode	• Front knob control	• Front knob control	• Front knob control
burners	2 burners	4 burners	4 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	-	• 1.75kW x 1	• 1.75kW x 2
Rapid burner	• 3.0kW x 1	-	• 3.0kW x 1
Wok burner	-	• 3.5kW x 1	-
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• SS 201	• SS 201	• SS 201
Panel colour	• SS	• SS	• SS
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	○	○	○
NG gas regulator	○	○	○
LPG test nipple	○	○	○
General information			
Product Dimensions (mm)			
Net (WxDxH)	300x520x40mm	450x510x40mm	600x510x40mm
Packaging (WxDxH)	335x555x135	515*555*135mm	640*550*135mm
Cut-out (WxD)	490*268mm	420*480mm	560*480mm
Product Weight (Kg)			
Net	5.4kg	7.4kg	7.6kg
Gross	5.9kg	8.2kg	8.41kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	1188 / 2422 / 2760	760 / 1556 / 1791	613 / 1248 / 1452
MOQ per order (pcs)	200	200	200
Optional with extra cost			

GAS HOB

Stainless steel

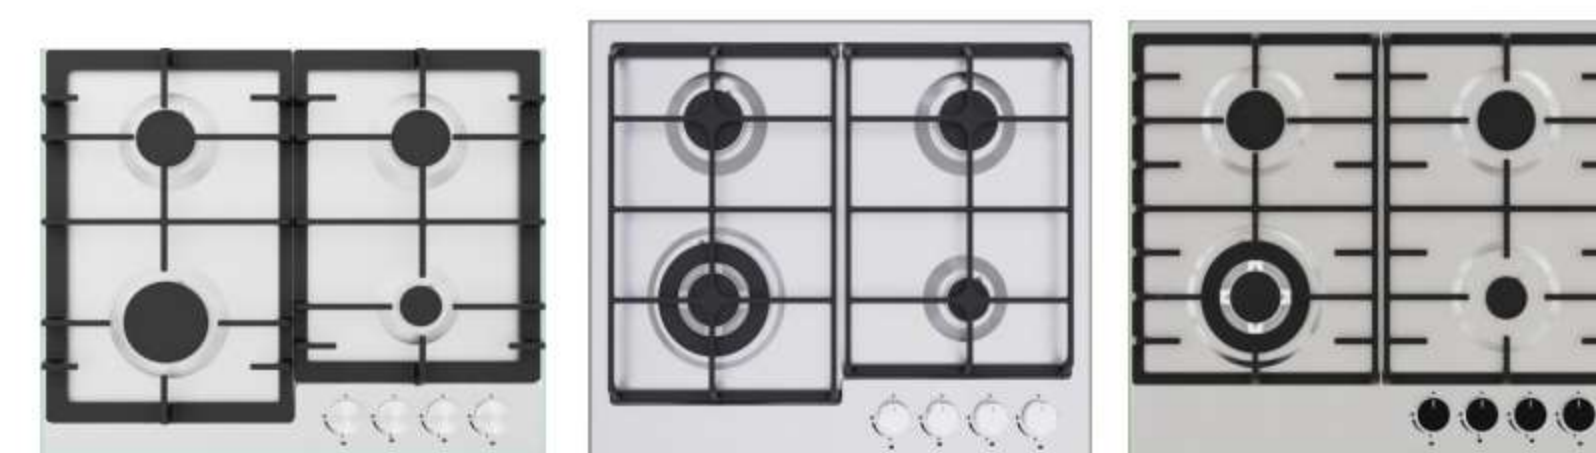

AOMS Model No.	CICA6040-A	AICK6042	AICY6042
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	60cm	60cm	60cm
Control mode	• Front knob control	• Front knob control	• Front knob control
burners	4 burners	4 burners	4 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 2	• 1.75kW x 2
Rapid burner	• 3.0kW x 1	-	-
Wok burner	-	• 3.5 kW x 1	• 3.5kW x 1
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• SS 201	• SS 201	• SS 201
Panel colour	• SS	• SS	• SS
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	○	○	○
NG gas regulator	○	○	○
LPG test nipple	○	○	○
General information			
Product Dimensions (mm)			
Net (WxDxH)	600x510x40mm	600x510x40mm	600x510x40mm
Packaging (WxDxH)	640*550*135mm	640*550*135mm	640*550*135mm
Cut-out (WxD)	560*480mm	560*480mm	560*480mm
Product Weight (Kg)			
Net	7.7kg	7.8kg	8.9kg
Gross	8.51kg	8.6kg	11.3kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	613 / 1248 / 1452	613 / 1248 / 1452	613 / 1248 / 1452
MOQ per order (pcs)	200	200	200
Optional with extra cost			





GAS HOB

Stainless steel



AOMS Model No.	JICC6042	MECV6042	CICA7042-A
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	60cm	60cm	70cm
Control mode	• Side knob control	• Front knob control	• Front knob control
burners	4 burners	4 burners	5 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 1	• 1.75kW x 1
Rapid burner	-	• 3.0kW x 1	-
Wok burner	• 3.5kW x 1	• 3.5kW x 1	• 3.5kW x 2
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification			
Knob	• Metal	• Retro metal knobs (14)	• Metal
Panel material	• SS 201	• Coating steel panel (AIM02)	• SS 201
Panel colour	• SS & Black glass	• Ivory	• SS
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	○	○	○
NG gas regulator	○	○	○
LPG test nipple	○	○	○
General information			
Product Dimensions (mm)			
Net (WxDxH)	580x500x40mm	600x510x40mm	700x510x40mm
Packaging (WxDxH)	620*530*135mm	640*550*135mm	740*550*135mm
Cut-out (WxD)	560*480mm	560*480mm	560*480mm
Product Weight (Kg)			
Net	8.1kg	10.0kg	11.0kg
Gross	9.3kg	11.0kg	12.0kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	652 / 1332 / 1545	613 / 1248 / 1452	532 / 1095 / 1230
MOQ per order (pcs)	200	200	200
Optional with extra cost			

GAS HOB

Stainless steel



AOMS Model No.	DICC7052	CICA9042-A	DICC9052L-A
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	70cm	90cm	90cm
Control mode	• Front knob control	• Front knob control	• Front knob control
burners	5 burners	5 burners	5 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 2	• 1.75kW x 2
Rapid burner	• 3.0kW x 1	• 3.0kW x 1	• 3.0kW x 1
Wok burner	• 3.5kW x 1	• 3.5kW x 1	• 3.5kW x 1
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• SS 201	• SS 304	• SS 304
Panel colour	• SS & Black glass	• SS	• SS & Black glass
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	○	○	○
NG gas regulator	○	○	○
LPG test nipple	○	○	○
General information			
Product Dimensions (mm)			
Net (WxDxH)	700x510x40mm	860x510x40mm	860x510x40mm
Packaging (WxDxH)	740*550*135mm	920*550*135mm	920*550*135mm
Cut-out (WxD)	560*480mm	830*480mm	830*480mm
Product Weight (Kg)			
Net	11.3kg	14.1kg	14.7kg
Gross	12.4kg	15.6kg	16.1kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	532 / 1095 / 1230	420 / 884 / 1001	420 / 884 / 1001
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Gas hob

gas on glass



GAS HOB

Gas on glass



AOMS Model No.	AGCX3020	AGCA4532-A	AGCA6040-A	AGCX6042
Functions				
FFD	•	•	•	•
Auto-ignition	•	•	•	•
Standard specification				
Length	30cm	45cm	60cm	60cm
Control mode	• Front knob control	• Front knob control	• Front knob control	• Front knob control
burners	2 burners	3 burners	4 burners	4 burners
Burner	• Chinese	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	-	• 1.75kW x 1	• 1.75kW x 2	• 1.75kW x 2
Rapid burner	• 3.0kW x 1	-	• 3.0kW x 1	-
Wok burner	-	• 3.5kW x 1	-	• 3.5 kW x 1
Power cord	• 1.0m	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification				
Knob	• Metal	• Metal	• Metal	• Metal
Panel material	• Glass	• Glass	• Glass	• Glass
Panel colour	• Black	• Black	• Black	• Black
Bevelled edge	-	-	-	-
frame	-	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories				
Injector conversion kit	o	o	o	o
NG gas regulator	o	o	o	o
LPG test nipple	o	o	o	o
General information				
Product Dimensions (mm)				
Net (WxDxH)	300x520x40mm	450x510x40mm	600x510x40mm	600x510x40mm
Packaging (WxDxH)	335x555x135	515*555*135mm	640*550*135mm	640*550*135mm
Cut-out (WxD)	268*490mm	420*480mm	560*480mm	560*480mm
Product Weight (Kg)				
Net	6.4kg	9.2kg	11.9kg	13kg
Gross	6.9kg	10.0kg	12.8kg	14kg
Loading Quantity				
20'GP / 40'GP / 40'HQ	1188 / 2422 / 2760	760 / 1556 / 1791	613 / 1248 / 1452	613 / 1248 / 1452
MOQ per order (pcs)	200	200	200	200
Optional with extra cost				

GAS HOB

Gas on glass



AOMS Model No.	AGCP6042-A	AGCY6042	MGCT6042-T
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	60cm	60cm	60cm
Control mode	• Front knob control	• Front knob control	• Front knob control with Touch control timer
burners	4 burners	4 burners	4 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 2	• 1.75kW x 2
Rapid burner	-	-	• 3.0kW x 1
Wok burner	• 3.5 kW x 1	• 3.5 kW x 1	• 3.5 kW x 1
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance	CE/SAA/SAI, RosH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• Glass	• Glass	• Glass
Panel colour	• Black	• Black	• Black
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	o	o	o
NG gas regulator	o	o	o
LPG test nipple	o	o	o
General information			
Product Dimensions (mm)			
Net (WxDxH)	600x510x40mm	600x510x40mm	600x510x40mm
Packaging (WxDxH)	640*550*135mm	640*550*135mm	640*550*135mm
Cut-out (WxD)	560*480mm	560*480mm	560*480mm
Product Weight (Kg)			
Net	13kg	12.6kg	14.8kg
Gross	14kg	13.6kg	15.5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	613 / 1248 / 1452	613 / 1248 / 1452	613 / 1248 / 1452
MOQ per order (pcs)	200	200	200
Optional with extra cost			





GAS HOB


Gas on glass



AOMS Model No.	FGCB6042-A	AGCP6032-B	AGCA7022
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	60cm	60cm	30cm
Control mode	• Side knob control	• Front knob control	• Front knob control
burners	4 burners	3 burners	2 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	-
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 1	-
Rapid burner	• 3.0kW x 1	• 155mm, 1200W	-
Wok burner	-	• 3.5kW x 1	• 3.5kW x 2
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 53
Certification	CE/SAA/SAI, RoSH compliance	CE/SAA/SAI, RoSH compliance	CE/SAA/SAI, RoSH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• Glass	• Glass	• Glass
Panel colour	• Black	• Black	• Black
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	o	o	o
NG gas regulator	o	o	o
LPG test nipple	o	o	o
General information			
Product Dimensions (mm)			
Net (WxDxH)	600x510x40mm	600x510x48mm	700x510x40mm
Packaging (WxDxH)	620*530*135mm	640*550*135mm	740*550*135mm
Cut-out (WxD)	560*480mm	560*490mm	560*480mm
Product Weight (Kg)			
Net	12.1kg	11.7kg	10.9kg
Gross	13.0kg	12.4kg	12.6kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	613 / 1248 / 1452	613 / 1248 / 1452	532 / 1095 / 1230
MOQ per order (pcs)	200	200	200
Optional with extra cost			

GAS HOB

Gas on glass

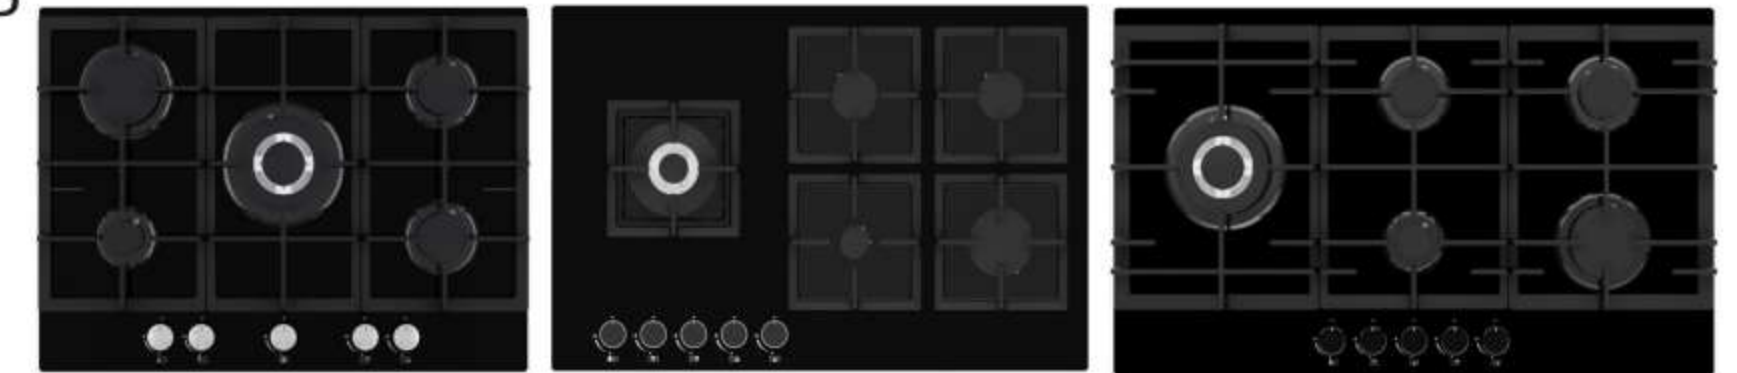

AOMS Model No.	AGCP7052	AGCB7752L-A	AGCA9052L
Functions			
FFD	•	•	•
Auto-ignition	•	•	•
Standard specification			
Length	70cm	77cm	90cm
Control mode	• Front knob control	• Front knob control	• Front knob control
burners	5 burners	5 burners	5 burners
Burner	• Chinese	• Chinese	• Chinese
Aux burner	• 1.0kW x 1	• 1.0kW x 1	• 1.0kW x 1
Semi-rapid burner	• 1.75kW x 2	• 1.75kW x 2	• 1.75kW x 2
Rapid burner	• 3.0kW x 1	• 3.0kW x 1	• 3.0kW x 1
Wok burner	• 3.5kW x 1	• 3.5kW x 1	• 3.5kW x 1
Power cord	• 1.0m	• 1.0m	• 1.0m
Energy efficiency	EE gas hob > 54	EE gas hob > 54	EE gas hob > 54
Certification	CE/SAA/SAI, RoSH compliance	CE/SAA/SAI, RoSH compliance	CE/SAA/SAI, RoSH compliance
Cosmetic specification			
Knob	• Metal	• Metal	• Metal
Panel material	• Glass	• Glass	• Glass
Panel colour	• Black	• Black	• Black
Bevelled edge	-	-	-
frame	-	-	-
Pan Stands	• Cast iron	• Cast iron	• Cast iron
Carton	• Shrink wrapping package	• Shrink wrapping package	• Shrink wrapping package
Accessories			
Injector conversion kit	o	o	o
NG gas regulator	o	o	o
LPG test nipple	o	o	o
General information			
Product Dimensions (mm)			
Net (WxDxH)	700x510x40mm	770x510x40mm	860x510x40mm
Packaging (WxDxH)	740*550*135mm	810*550*135mm	920*550*135mm
Cut-out (WxD)	560*480mm	720*480mm	830*480mm
Product Weight (Kg)			
Net	14.6kg	16.2kg	20.3kg
Gross	15.8kg	18.5kg	21.3kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	532 / 1095 / 1230	480 / 1000 / 1130	420 / 884 / 1001
MOQ per order (pcs)	200	200	200
Optional with extra cost			

Hood

A combination of power air evacuation and quiet operation, our range hood is a good choice along with our ovens and hobs.





HOOD



Product Category	Under cabinet Hood	Under cabinet Hood	Telescopic Hood
AOMS Model No.	CP60IX/D-P2P1L	CP60IX/B-K3P1L	CT60IX/B-K2Z1L
Standard specification			
Width (cm)	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm	• 60 cm ◊ 50--90cm
Voltage	• 220-240V	• 220-240V	• 220-240V
Frequency	• 50/60Hz	• 50/60Hz	• 50/60Hz
Control	• 5 buttons switch ◊ Touch control	• 5 buttons switch	• Rocker switch ◊ Touch control
Lighting	• 2 x 1.5W LED lamp	• 1 x 1.5W LED lamp	• 1 x 1.5W LED lamp
Installation	• Wall Mounted	• Wall Mounted	• Wall Mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• -	• EU energy class B	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC70W x 2	• AC65W x 1	• AC65W ◊ 210W ◊ 280W
Max air flow rate (m3/h)	• 280 m3/h	• 350m3/h	• 350 m3/h ◊ 650m3/h ◊ 750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 2 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	◊ Optional
Extraction	•	•	•
Housing colour	• INOX ◊black ◊white ◊ivory	• INOX ◊black ◊white ◊ivory	• INOX ◊black ◊white ◊ivory
Accessories			
Filter	• Aluminium x 2	• Aluminium x 2	• Aluminium x 2
Height of Chimney	-	-	-
Plastic pipe	◊ 120mm x 1.5m	◊ 120mm x 1.5m	◊ 120mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	598*100*480	598x141x502	600*170*276
Packaging (WxHxD)	640*150*532	645x180x535	640*306*219
Carton	• Brown box	• Brown box	• Shrink wrapping package ◊ Brown box
Weight (Kg)			
Net	4.5kg	5 kg	4.9kg
Gross	5.5kg	5.5kg	5.1kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	576/1150/1350	470/940/1080	720/1456/1663
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Wall mounted Hood	Wall mounted Hood	Wall mounted Hood
AOMS Model No.	CK60IX/A-K2P1L	CN60IX/A-N1P1L	CC60IX/B-K2P1L
Standard specification			
Width (cm)	• 60 cm ◊70 cm ◊ 90 cm	• 60 cm ◊ 90 cm	• 60 cm ◊ 60--90cm
Voltage	• 220-240V	220-240V	220-240V
Frequency	• 50/60Hz	50/60Hz	50/60Hz
Control	• 5 buttons switch ◊ Micro switch	• 5 buttons switch ◊ Micro switch	• 5 buttons switch ◊ Micro switch ◊ Touch control
Lighting	• 1 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 1 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class D	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC65W	• AC100W ◊ AC210W ◊ AC280W	• AC 65W
Max air flow rate (m3/h)	• 350 m3/h	• 550 m3/h ◊ 650m3/h ◊ 750m3/h	• 350 m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◊black ◊white ◊ivory	• INOX ◊black ◊white ◊ivory	• INOX ◊black ◊white
Accessories			
Filter	• Aluminium x 2 ◊ Aluminium x 3	• Aluminium x 2 ◊ Aluminium x 3	• Aluminium x 1
Height of Chimney	• 400+330mm	• 400+330mm	• 400+400mm
Plastic pipe	◊ 120mm x 1.5m	◊ 150mm x 1.5m	◊ 120mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*140*475	600*286*498	600*480*170
Packaging (WxHxD)	645*180*530	640*325*555	650*246*550
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	4.6kg	7.6kg	6.7kg
Gross	5.8kg	9.5kg	8.5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	468/ 936 / 1080	260/520/582	336/672/798
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Wall mounted Hood	Wall mounted Hood	Wall mounted Hood
AOMS Model No.	CC60IX/A-N1P1L	CL60IX/A-N1P1L	CS60IX/B-K2P1L
Standard specification			
Width (cm)	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• 5 buttons switch ◊ Micro switch ◊ Touch control	• 5 buttons switch ◊ Micro switch ◊ Touch control	• 5 buttons switch ◊ Micro switch ◊ Touch control
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 1 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class D	• EU energy class D	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC100W ◊ AC210W ◊ AC280W	• AC100W ◊ AC210W ◊ AC280W	• AC65W
Max air flow rate (m3/h)	• 550 m3/h ◊ 650m3/h ◊ 750m3/h	• 550 m3/h ◊ 650m3/h ◊ 750m3/h	• 350 m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white
Accessories			
Filter	• Aluminium x 2	• Aluminium x 1	• Aluminium x 2 ◊ Aluminium x 3
Height of Chimney	• 400+400mm	• 400+400mm	• 400+400mm
Plastic pipe	◊ 150mm x 1.5m	◊ 150mm x 1.5m	◊ 120mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*470*282	600*470*293	600*480*170
Packaging (WxHxD)	652*350*530	655*345*540	650*246*550
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	9kg	9kg	6.7kg
Gross	11.5kg	11.5kg	8.5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	230/501/588	238/507/570	336/672/798
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Wall mounted Hood	Angled glass Hood	Angled glass Hood
AOMS Model No.	CS60IX/A-N2T1L	CV60BK/A-V1T1L	CV60BK/B-V1T1L
Standard specification			
Width (cm)	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Touch control ◊ 5 buttons switch ◊ Micro switch	• Touch control ◊ 5 buttons switch	• Touch control ◊ 5 buttons switch
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class B	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC210W ◊ AC 280W ◊ AC380W	• AC100W ◊ AC210W ◊ AC280W	• AC100W ◊ AC210W ◊ AC280W
Max air flow rate (m3/h)	• 650 m3/h ◊ 750m3/h ◊ 850m3/h	• 400 m3/h ◊ 650m3/h ◊ 750m3/h	• 400 m3/h ◊ 650m3/h ◊ 750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◊ black ◊ white	• black ◊ white	• black ◊ white
Accessories			
Filter	• Aluminium x 2 ◊ Aluminium x 3	• Aluminium x 1	• Aluminium x 1
Height of Chimney	• 400+400mm	• 400+330mm	• 400+330mm
Plastic pipe	◊ 150mm x 1.5m	◊ 150mm x 1.5m	◊ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*485*262	600*330*432	600*330*432
Packaging (WxHxD)	650*320*529	650*380*485	650*380*485
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	11.3kg	11kg	11.5kg
Gross	12.1kg	12.8kg	13.3kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	260/558/630	250/515/588	250/515/588
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			



HOOD



Product Category	Angled glass Hood	Angled glass Hood	Angled glass Hood
AOMS Model No.	CV60BK/A-V1T1M	CV60BK/B-V1T1F	CV60BK/B-V1T1E
Standard specification			
Width (cm)	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Touch control ◊ 5 buttons switch	• Touch control ◊ 5 buttons switch	• Touch control ◊ 5 buttons switch
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class B	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	•AC100W ◊AC210W ◊ AC280W	•AC100W ◊AC210W ◊ AC280W	•AC100W ◊AC210W ◊ AC280W
Max air flow rate (m3/h)	• 400 m3/h ◊650m3/h ◊750m3/h	• 400 m3/h ◊650m3/h ◊750m3/h	• 400 m3/h ◊650m3/h ◊750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	•black ◊white	•black ◊white	•black ◊white
Accessories			
Filter	• Aluminium x 1	• Aluminium x 1	• Aluminium x 1
Height of Chimney	• 400+330mm	• 400+330mm	• 400+330mm
Plastic pipe	◊ 150mm x 1.5m	◊ 150mm x 1.5m	◊ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*355*443	600*318*389	600*304*389
Packaging (WxHxD)	650*405*493	650*350*440	650*350*440
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	12kg	10.5kg	10.5kg
Gross	14kg	12.5kg	12.5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	222/459/505	290/600/665	290/600/665
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Angled glass Hood	Angled glass Hood	Angled glass Hood
AOMS Model No.	CV60BK/B-V1T1N	CV60BK/F-N2T5G	CV60WH/F-N2T5Q
Standard specification			
Width (cm)	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm	• 60 cm ◊ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Touch control ◊ 5 buttons switch	• Touch control	• Touch control
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class B	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	•AC100W ◊AC210W ◊ AC280W	•AC210W ◊ AC280W	•AC210W ◊AC280W
Max air flow rate (m3/h)	• 400 m3/h ◊650m3/h ◊750m3/h	• 650m3/h ◊750m3/h	• 650m3/h ◊750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	•black ◊white	•black ◊white	•white ◊ black
Accessories			
Filter	• Aluminium x 1	• Aluminium x 1	• Aluminium x 2 ◊ Aluminium x 3
Height of Chimney	• 400+330mm	• 400+330mm	• 400+330mm
Plastic pipe	◊ 150mm x 1.5m	◊ 150mm x 1.5m	◊ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*343*520	600*434*524	600*480*408
Packaging (WxHxD)	650*390*570	650/485/585	660*534*463
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	10.9kg	15.6kg	15.1kg
Gross	13.8kg	18.9kg	16.5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	192/403/450	145/312/346	181/375/408
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Angled glass Hood	Angled glass Hood	Built-in Hood
AOMS Model No.	CV60WH/F-N2T5J	CV90BK/S-E4T10L	CQ60IX/A-K2P1L
Standard specification			
Width (cm)	• 60 cm ◯ 60--90cm	• 90 cm ◯ 60--90cm	• 60 cm ◯ 50--90cm
Voltage	220~240V	220~240V	• 220~240V
Frequency	50/60Hz	50/60Hz	• 50/60Hz
Control	• Touch control	• Touch control	• 5 buttons switch ◯ Micro switch ◯ Touch control
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 2x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall Mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class B	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC210W ◯ AC 280W	• EC300W ◯ AC210W ◯ AC280W	• AC65W ◯ AC210W ◯ AC280W
Max air flow rate (m3/h)	• 650m3/h ◯ 750m3/h	• 850m3/h	• 350 m3/h ◯ 650m3/h ◯ 750m3/h
Fan speeds	• 3 speeds	• 3 speeds ◯ Optional	• 2 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◯ black ◯ white	• INOX ◯ black ◯ white	• INOX ◯ black ◯ white
Accessories			
Filter	• Aluminium x 1	• Aluminium x 3 ◯ Aluminium x 2	• Aluminium x1
Height of Chimney	• 400+330mm	• 400+330mm	-
Plastic pipe	◯ 150mm x 1.5m	◯ 150mm x 1.5m	◯ 120mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	600*380*518	900*391*472	600*291*182
Packaging (WxHxD)	660*460*583	950*440*540	632*336*250
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	15.1kg	14.5kg	5.8kg
Gross	16.5kg	16 kg	5kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	171/351/374	124/248/310	578/1174/1263
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Wall mounted Hood	Wall mounted Hood	Wall mounted Hood
AOMS Model No.	CS70IX/V-E4T10L	CS90IX/F-E4T16H	CT70IX/T-E4T13L
Standard specification			
Width (cm)	• 70 cm ◯ 60--90cm	• 90 cm ◯ 60--90cm	• 70 cm ◯ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Touch control	• Touch control	• Touch control
Lighting	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp	• 2 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Wall mounted
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class A++	• EU energy class A++	• EU energy class A++
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• EC300W ◯ AC210W ◯ AC280W	• EC300W ◯ AC210W ◯ AC280W	• EC300W ◯ AC210W ◯ AC280W
Max air flow rate (m3/h)	• 850m3/h ◯ 650m3/h ◯ 750m3/h	• 850m3/h ◯ 650m3/h ◯ 750m3/h	• 850m3/h ◯ 650m3/h ◯ 750m3/h
Fan speeds	• 3 speeds ◯	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◯ black ◯ white	• INOX ◯ black ◯ white	• INOX ◯ black ◯ white
Accessories			
Filter	◯ Optional	• Aluminium x 3 ◯ Aluminium x 2	• Aluminium x 4
Height of Chimney	◯ 500mm	• 400+400mm	◯ 500mm
Plastic pipe	◯ 150mm x 1.5m	◯ 150mm x 1.5m	◯ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	700*356*330	900*457*330	700*355*356
Packaging (WxHxD)	750*400*510	950*400*510	750*425*410
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	10kg	12kg	12.2kg
Gross	12kg	14kg	13.6kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	191/400/454	152/313/359	205/415/498
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			



HOOD



Product Category	Wall mounted Hood	Wall mounted Hood	Oval Hood
AOMS Model No.	CS90IX/D-E8T10L	CW90IX/A-E8T16L	CU90IX/A-N5Q1L
Standard specification			
Width (cm)	• 90 cm ◊ 60--90cm	• 90 cm	• 60 cm ◊ 60--90cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Touch control	• Touch control	• Micro switch
Lighting	• 2 x 1.5W LED lamp	• 4 x 1.5W LED lamp	• 3 x 1.5W LED lamp
Installation	• Wall mounted	• Wall mounted	• Island hood
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class A++	• EU energy class A++	• EU energy class B
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• EC500W ◊ AC210W ◊ AC280W	• EC500W ◊ AC210W ◊ AC280W	• AC210W ◊ AC280W
Max air flow rate (m3/h)	• 1800m3/h ◊ 650m3/h ◊ 750m3/h	• 1800m3/h ◊ 650m3/h ◊ 750m3/h	• 650m3/h ◊ 750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white
Accessories			
Filter	• Aluminium x3	• Aluminium x 2	• Aluminium x 1
Height of Chimney	• 400+400mm	-	• 600mm
Plastic pipe	◊ 180mm x 1.5m	◊ 180mm x 1.5m	◊ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	900*457*556	1100*600*330	900*500*945
Packaging (WxHxD)	945*616*510	1150*650*390	960*560*145 & 410*410*930
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	20.5kg	18.2kg	7.8 & 16kg
Gross	23 kg	19.6kg	9.2 & 17.4kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	93/186/219	108/216/216	120/240/270
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			

HOOD



Product Category	Oval Hood	Island Hood	Island Hood
AOMS Model No.	CU90IX/B-N5Q1L	CLZ90IX/A-E4T1L	CSZ90IX-E4T1L
Standard specification			
Width (cm)	• 90 cm	◊ 60 cm • 90 cm	◊ 60 cm • 90 cm
Voltage	220~240V	220~240V	220~240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Control	• Micro switch	• Touch control ◊ Micro switch	• Touch control ◊ Micro switch
Lighting	• 4 x 1.5W LED lamp	• 2 x1.5W LED lamp	• 4 x 1.5W LED lamp
Installation	• Island hood	• Island hood	• Island hood
Power cord	• 1.7m without plug	• 1.7m without plug	• 1.7m without plug
Energy efficiency	• EU energy class B	• EU energy class D - A++	• EU energy class E - A
Certification	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance	GS/SAA/EMC/EUP, RosH compliance
Venting			
Motor	• AC210W ◊ AC280W	• EC300W ◊ AC210W ◊ AC280W	• EC300W ◊ AC210W ◊ AC280W
Max air flow rate (m3/h)	• 650m3/h ◊ 750m3/h	• 850m3/h ◊ 650m3/h ◊ 750m3/h	• 850m3/h ◊ 650m3/h ◊ 750m3/h
Fan speeds	• 3 speeds	• 3 speeds	• 3 speeds
Noise level (dBA)	-	-	-
Recirculation	•	•	•
Extraction	•	•	•
Housing colour	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white	• INOX ◊ black ◊ white
Accessories			
Filter	• Aluminium x 1	• Aluminium x 2	• Aluminium x 3
Height of Chimney	• 600mm	• 600+500mm	• 600+500mm
Plastic pipe	◊ 150mm x 1.5m	◊ 150mm x 1.5m	◊ 150mm x 1.5m
General information			
Dimensions (mm)			
Net (WxHxD)	900*900*730	900*278*606	900*278*606
Packaging (WxHxD)	950*950*145 & 410*410*650	955*380*665	955*380*665
Carton	• Brown box	• Brown box	• Brown box
Weight (Kg)			
Net	11.5 & 15kg	20 kg	19.5kg
Gross	12.7 & 16.4kg	23.5kg	23 kg
Loading Quantity			
20'GP / 40'GP / 40'HQ	112/224/242	125/255/295	125/255/295
MOQ (pcs)	200	200	200
Optional with extra cost			
Charcoal filter			